



# CHECK LIST FOR CUSTOM DESIGNED LCD

## 1. Outline dimensions

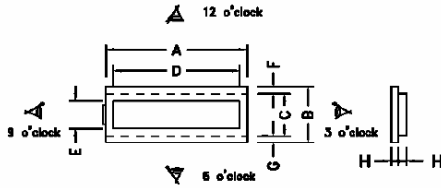

A	Length of glass	
B	Width of front glass	
C	Width of bottom glass	
D	Length of viewing area	
E	Width of viewing area	
F	Size of terminal part	
G	Size of terminal part	
H	Thickness of glass	<input type="checkbox"/> 1.1mm <input type="checkbox"/> 0.7mm <input type="checkbox"/> 0.55mm

## 2. Panel form

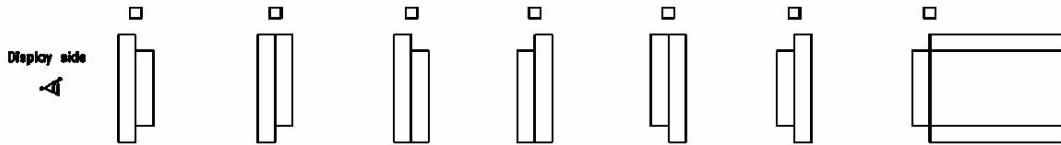

## 3. Mode of display

### 3.1 LCD type

- TN
- HTN
- STN
  - Yellow-Green
  - Gray
  - Blue (Negative)
- FSTN

### 3.2 Display type

- Positive
- Negative

### 3.3 Polarizer type

- Reflective
- Transflective
- Transmissive

### 3.4 Polarizer

- Normal
- Anti-glare
- Anti-UV

## 4. Viewing direction

- 6 O'clock
- 12 O'clock
- 3 O'clock
- 9 O'clock

## 5. Driving Method

Driving LSI \_\_\_\_\_  
 Operating voltage \_\_\_\_\_ V  
 Operating frequency \_\_\_\_\_ Hz  
 \_\_\_\_\_ Duty \_\_\_\_\_ Bias

## 6. Connection

- Elastomer
- Heat seal
- Metal pins
  - Pitch
  - 2.54mm
  - 2.00mm
  - 1.80mm

No. of metal pins \_\_\_\_\_  
 Pin length \_\_\_\_\_ mm

## 7. Environmental Condition

### 7.1 Operating temperature range

- 0 °C to 50 °C
- \_\_\_\_\_ °C to \_\_\_\_\_ °C

### 7.2 Storage temperature range

- 20 °C to 60 °C
- \_\_\_\_\_ °C to \_\_\_\_\_ °C

## 8. Pin-out table

- Customer provided
- Our proposal

## 9. Artwork Film

- Yes
- No