


|     |     |    |    |     |   |     |     |     |     |     |     |     |     |      |      |
|-----|-----|----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| 1   | 2   | 3  | 4  | 5   | 6 | 7   | 8   | 9   | 10  | 11  | 12  | 13  | 14  | 15   | 16   |
| VSS | VDD | VO | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LED+ | LED- |

- VDD : 5.0V±5%
- DISPLAY TYPE : STN YG, POSITIVE MODE
- POLARIZER MODE : TRANSFLECTIVE
- CONNECTOR : ZEBRA
- VIEW ANGLE : 6 O'CLOCK
- DRIVING METHOD : 4.5V, 1/16 DUTY, 1/5BIAS
- DISPLAY DRIVER : KS0066 OR EQUIVALENT
- BACKLIGHT COLOR : YELLOW GREEN
- BACKLIGHT Vf : 4.2V (TYP)
- BACKLIGHT If : 250mA (TYP)
- BEZEL FINISH : BLACK ELECTRO PLATING
- OPERATING TEMP : 0°C TO +50°C
- STORAGE TEMP : -10°C TO +60°C

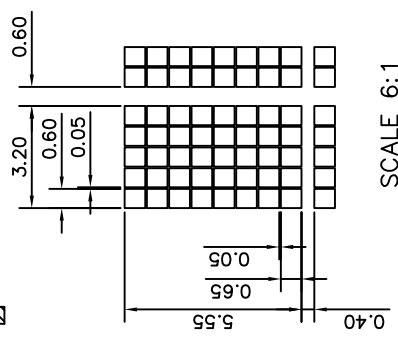

海南清华显示器科技开发有限公司  
HAINAN QINGHUA LCD TECHNOLOGY DEVELOPMENT CO.,LTD

UC202A-YP-FB-N-LB-YG

|              |       |            |
|--------------|-------|------------|
| DRAWN BY :   | F T T | 2005-04-18 |
| CHECKED BY : |       |            |
| Approve By : |       |            |

|        |              |
|--------|--------------|
| UNITS  | MM           |
| TITL   | CUSTOMER LCD |
| REV:   | A1           |
| SIZE:  | A4           |
| SHEET: | 1 OF 1       |
| SCALE: | NTS          |

