


CHECK LIST FOR CUSTOM DESIGNED LCM

1. Outline dimensions

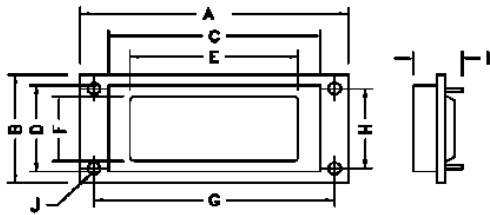

A	Length of outline dimension	
B	Width of outline dimension	
C	Length of metal frame	
D	width of metal frame	
E	Length of viewing area	
F	Width of viewing area	
G	Length of mounting hole	
H	Width of mounting hole	
I	Height of module	
J	Diameter of mounting hole	
K	Resolution	

2. Mode of display

2.1 LCD type

- TN
- HTN
- STN
 - Yellow-Green
 - Gray
 - Blue (Negative)
- FSTN

2.2 Display type

- Positive
- Negative

2.3 Polarizer type

- Reflective
- Transflective
- Transmissive

2.4 Polarizer

- Normal
- Anti-glare
- Anti-UV

3. Viewing direction

- 6 O'clock
- 12 O'clock
- 3 O'clock
- 9 O'clock

4. Driving Method

Driving LSI _____
 Operating voltage _____ V
 Operating frequency _____ Hz
 _____ Duty _____ Bias

5. Connection

- Elastomer
- Heat seal
- Metal pins
 - Pitch 2.54mm
 - 2.00mm
 - 1.80mm
- FPC

No. of metal pins _____
 Pin length _____ mm

6. Environmental Condition

6.1 Operating temperature range

- 0 °C to 50 °C
- _____ °C to _____ °C

6.2 Storage temperature range

- 20 °C to 60 °C
- _____ °C to _____ °C

7. Backlight

7.1 Type of backlight

- NIL
- LED light box (Array type)
- LED light guide (Edge type)
- EL

7.2 Color of backlight

- Yellow-green
- Amber
- Blue
- Green
- White
- Other: _____

8. Interface

- Parallel
 - 8 bits
 - 4 bits
- Serial
- I2C
- Other: _____

9. Pin-out table

- Customer provided
- Our proposal

10. Artwork Film

- Yes
- No